




## EXHAUST FILTERS

Pleated cardboard

### ACCORD-H

An AKKORD-STD paired with a synthetic layer for greater efficiency.

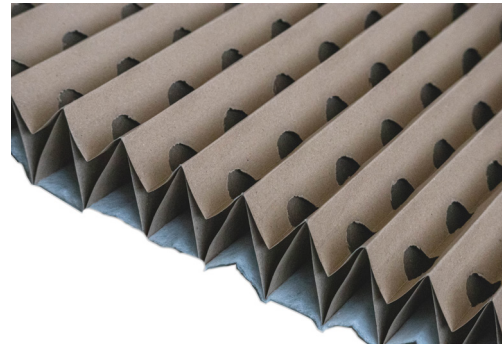

### ACCORD-H

Specifications	ACCORD-H
Thickness	60 mm + 10 mm of synthetic polyester fibre
Recommended airflow velocity	0.25 to 1 m/s
Initial pressure drop	12 Pa for 0.5 m/s
Maximum pressure drop	128-150 Pa
Optimal loading capacity	20 kg/m <sup>2</sup>
Efficiency	99.2% max.
Positioning	26 pleats per metre
Standard dimensions	1.00 m x 8 m (8 m <sup>2</sup> )
(Other dimensions available on request)	0.90 m x 9.2 m (8 m <sup>2</sup> ) 0.75 m x 10.8 m (8 m <sup>2</sup> )