




EXHAUST FILTERS
Pleated cardboard

ACCORD-STD

The design of the perforated accordion filter creates inertial separation allowing maximum overspray to be captured.

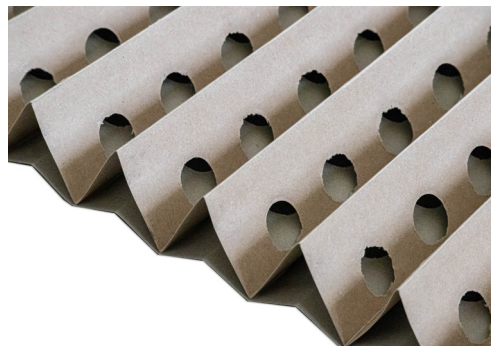

ACCORD-STD

Specifications	ACCORD-STD
Thickness	60 mm
Recommended airflow velocity	0.25 to 1 m/s
Initial pressure drop	12 Pa for 0.5 m/s
Maximum pressure drop	128-150 Pa
Loading capacity	16 kg/m ²
Efficiency	98.1% maximum
Positioning	26 pleats per metre
Standard dimensions (Other dimensions available on request)	0.75 m x 13.5 m (10 m ²) 0.9 m x 11.2 m (10 m ²) 1.00 m x 10 m (10 m ²)